



Tradelink
Windowsolutions

ultraSky
by ultraframe

a **bright** idea



Available in White, Grey & Black



The UltraSky roof light is stunning, enhancing any style of property, traditional or modern alike

SIZES

The UltraSky rooflight is available in a number of bespoke rectangular sizes ranging from 1m x 1.5m to 2m x 4m.

COLOUR OPTIONS

Choose the stylish White PVC option to match your modern window frames, or for that extra "Wow" factor go for the Aluminium option, available in White, Anthracite Grey or Satin Black. Internally the rooflight is clad in white PVC or upgraded to anthracite grey or satin black to either match or contrast the external finish.

GLAZING

The highly thermally efficient glazing options will help reduce heat loss and noise pollution, whilst letting the desired amount of light into your room.

EXTRAS

Add a roof vent to let in the fresh air – Roof vents are available with a manual opener, automatic opener or an automatic opener with rain and temperature control. * (roof vents only available in selected sizes).



For more information about ultraSky please call **Tradelink** now Tel: **01354 657650**

Email: info@tradelinkdirect.co.uk

Website: www.tradelinkdirect.co.uk





Tradelink
Windowsolutions


Introduces

ultraSky
by ultraframe



UltraSky is based on the tried and tested BBA approved Ultraframe Classic roofing system

KEY PERFORMANCE CRITERIA

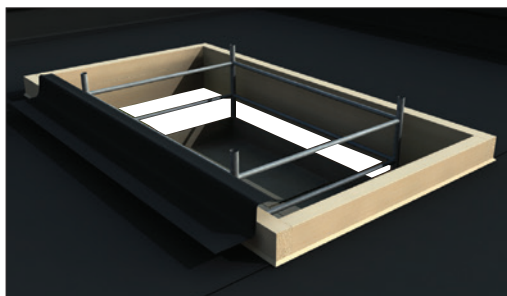

A timber kerb of 150mm high x 70mm wide (not supplied) must be fitted around the opening in the flat roof – weatherproofing membrane of clients choice laps onto top face of kerb

Rectangular double ended rooflights, with a width from 1000-2000*mm and a length from 2000-4000*mm.

Thermally broken aluminium ridge body. 25 degree fixed pitch to all four sides.

Glazing bar top caps in either chamfered PVC (white only) or aluminium (White RAL 9003 80% gloss, Anthracite Grey RAL 7016 30% gloss and Satin Black RAL 9005 60% gloss).

Low profile eaves beam (no gutter) designed to be fitted with oversailing 24mm double glazed units (high performance low e, self cleaning and solar control in blue or neutral/clear - units can be supplied with the rooflight).

UltraSky is designed around maximum uninterrupted sight lines – bar numbers are reduced (or can be added if you prefer) and the ridge board and hub ends are as unobtrusive as possible.

The thermal performance has been optimised to make it suitable for extensions in domestic properties. Typical U value with 1.0 glass for a 1000mm wide x 2000mm long rooflight is 1.4 W/m2K.

*Width and length are defined as to the external face of the timber kerb (not supplied, recommended to be 150mm high x minimum of 70mm wide).



SET OUT & DIMENSIONS ARE ALWAYS MEASURED TO EXTERNAL FACE OF KERB

For more information about **ultraSky** please call **Tradelink** now Tel: **01354 657650**

Email: info@tradelinkdirect.co.uk

Website: www.tradelinkdirect.co.uk

